

**CLOSURE PLAN FOR EXISTING CCR LANDFILL
CRIST ASH LANDFILL 2
REV A – 10/17/2016
40 CFR 257.102(b)**

SITE INFORMATION

Site Name / Address

Plant Crist
11999 Pate Street
Pensacola, FL 32514

Owner Name / Address

Gulf Power Company
One Energy Place
Pensacola, FL 32520

CCR Unit

Ash Landfill 2

Closure Method

Close In-Place

CLOSURE PLAN DESCRIPTION

§ 257.102(b)(1)(i) – Narrative description of how the CCR unit will be closed.

The Plant Crist Ash Landfill 2 will be closed by leaving CCR in place. In accordance with § 257.102(b)(3), the written closure plan will be amended if there is a change in operation that would substantially affect the written closure plan in effect and/or if there are unanticipated events that necessitate a revision of the closure plan.

§ 257.102(b)(1)(iii) –Closure of the CCR unit by leaving CCR in place

The ash subgrade for the final cover of Landfill 2 will be graded to create a stable subgrade for the final cover system. In accordance with § 257.102(d), the final cover will be constructed to control, minimize or eliminate, to the maximum extent feasible, post closure infiltration of liquids into the waste and potential releases of CCR from the unit. This will be accomplished by providing sufficient grades and slopes to: 1) preclude the probability of future impoundment of water or sediment; 2) ensure slope and cover system stability; 3) minimize the need for further maintenance; and, 4) be completed in the shortest amount of time consistent with recognized and generally accepted good engineering practices.

The final cover system will be designed to minimize infiltration and erosion. The final cover system, at a minimum, will be designed to meet or exceed the requirements of 40 C.F.R. §257.102(d)(3)(i) or (ii) (traditional and alternative cover system). Final design will ensure the disruption of the integrity of the final cover system is minimized through a design that accommodates settlement and subsidence, in addition to providing an erosion layer for protection from wind or water erosion.

**CLOSURE PLAN FOR EXISTING CCR LANDFILL
CRIST ASH LANDFILL 2
REV A – 10/17/2016
40 CFR 257.102(b)**

§ 257.102(b)(1)(iv) – Estimate of the maximum inventory of CCR ever on-site over the active life of the CCR unit

Landfill 2 is currently in operation and has an initial design capacity of approximately 636,000 cubic yards of CCR. Future use of the unit will not substantially affect the written closure plan in effect.

§ 257.102(b)(1)(v) – Estimate of the largest area of the CCR unit ever requiring a final cover

Landfill 2 has an area of approximately 13 acres.

§ 257.102(b)(1)(vi) – Closure Schedule

The milestones and the associated timeframes are initial estimates. Some of the activities associated with the milestones will overlap. Milestones reflect approximate time to implement closure instead of dates. The landfill remains active and the time to full capacity will be dependent upon the amount of generation at the plant.

Milestones

Regulatory interface and permitting – 6 months

Subgrade Grading & Preparation – 4 months

Installation of final cover – 9 months

Estimate of Year in which all closure activities will be completed - TBD

**CLOSURE PLAN FOR EXISTING CCR LANDFILL
CRIST ASH LANDFILL 2
REV A – 10/17/2016
40 CFR 257.102(b)**

Certification Statement 40 CFR § 257.102

Initial Written Closure Plan for a CCR Surface Impoundment or Landfill

Site Name / Address

Plant Crist
11999 Pate Street
Pensacola, FL 32514

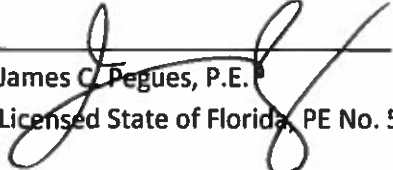
Owner Name / Address

Gulf Power Company
One Energy Place
Pensacola, FL 32520

CCR Unit

Ash Landfill 2

I hereby certify that the written closure plan was prepared in accordance with the requirements of 40 CFR § 257.102, and that the final cover system will meet the requirements of §257.102(d)(3).


James C. Pegues, P.E.
Licensed State of Florida, PE No. 52519

